


23W

SMART TUBE : T8

W

Total Flux	<2100lm
Efficiency	90lm/W \pm 10%
Color Temperature	5500K \pm 400
Power Consumption	23W \pm 10%
Input Power	90~240Vac (45~65Hz)
PF (Power Factor)	>0.90
Color Rendering Index	70 \pm 5%
Operation Temperature	-20~50°C
Storage Temperature	-40~80°C
Housing & Lampshade	PC + Al
Protection Rating	Indoor
Weight	325g
Working Life	>40,000 hrs
Figuration Size	Φ 26 X 1212mm

Eco-friendly product
No Mercury, No Lead (RoHS standard)

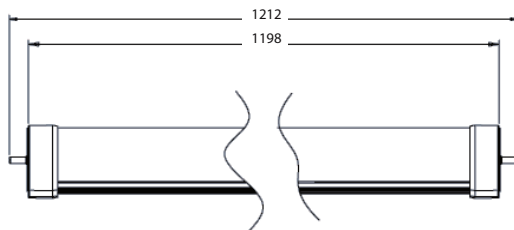

LEDLITEK

246 Kumho-ri Buyong-myeon, Cheongwon-gun, Chungcheongbuk-do, Korea, 363-942
Tel: +82-70-4331-3570 Fax: +82-43-263-3308