

Specifications P-DR Series

W

		P-DR3012C050M	P-DR6060C050M
Dimension	M-bar	1210 x 310 x 51.7mm	610 x 610 x 51.7mm
	T-bar	1195 x 295 x 51.7mm	595 x 595 x 51.7mm
Total Flux		3,500 lm	
Efficiency		70 lm/W	
Power Consumption		50W	
Input Power		90~240 Vac (50~60Hz)	
PF (Power Factor)		>0.9	
Output Voltage		40Vdc	
Operation temp.		-20~60°C	
Storage temp.		-40~80°C	
Housing & Lampshade		GI steel plate	
Protection Rating		Indoor	
Weight		4.9 Kg	
Working Life		>40,000 hrs	



Eco-friendly product
No Mercury, No Lead (RoHS standard)


P-DR3012C050M




P-DR6060C050M



SMPS

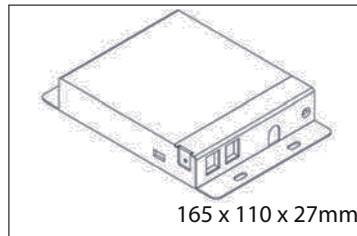

165 x 110 x 27mm

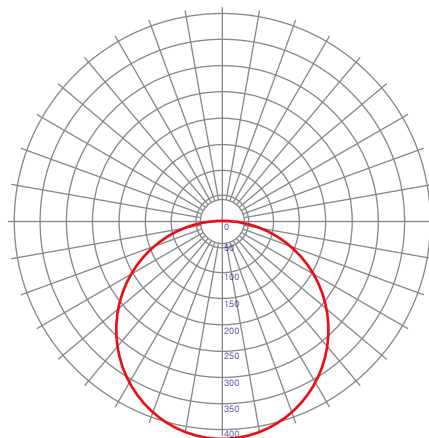

LEDLITEK

246 Kumho-ri Buyong-myeon, Cheongwon-gun, Chungcheongbuk-do, Korea, 363-942
Tel: +82-70-4331-3570 Fax: +82-43-263-3308